


AL Series - Thin Film Chip Inductor

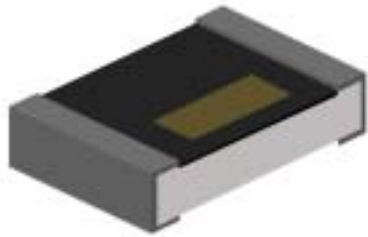


Features

- A Photo Lithographic Single Layer Ceramic Chip
- High SRF, Excellent Q, Superior Temperature Stability
- Tight Tolerance of $\pm 1\%$ or $\pm 0.1\text{nH}$
- Self Resonant Frequency Controlled within 10%
- Stable Inductance in High Frequency Circuit
- Highly Stable Design for Critical Needs
- Products with Pb-free Terminations Meet RoHS Requirements

Applications

- Cellular Telephone, Pagers and GPS Products
- VCO, TCXO Circuit and RF Transceiver Module
- Wireless LAN, Bluetooth Module, Communication Appliances

Construction

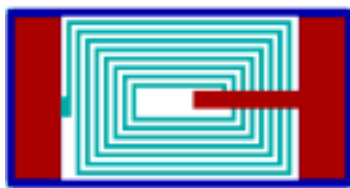

How to Order


How to Order

AL		02		G		T		10N	
SEI Type		Dimensions (LxW)		Inductance Tolerance		Packaging		Inductance	
Type	Codes	Dimensions (LxW)	EIA	Codes	Type	Codes	Type	Codes	Type
AL	AL03	1.6 x 0.8 mm	0603	J	$\pm 5\%$	T	Tape and Reel	1N0	1.0nH
	AL02	1.0 x 0.5 mm	0402	H	$\pm 3\%$			10N	10nH
				G	$\pm 2\%$			20N8	20.8nH
				F	$\pm 1\%$			R10	100nH
				S	$\pm 0.3\text{nH}$				
				C	$\pm 0.2\text{nH}$				
				B	$\pm 0.1\text{nH}$				

Dimensions

Unit: mm

Codes	A	B	C	D
AL03	1.6±0.10	0.8±0.10	0.45±0.10	0.3±0.20
AL02	1.0±0.05	0.5±0.05	0.32±0.05	0.2±0.10



Standard Electrical Specifications

0603 Chip Inductors

Inductance (nH)	Tolerance (% or nH)	Quality Factor /min.	Resistance DC/Max (Ohm)	Current DC/Max (mA)	Self Resonant Frequency/min. (GHz)
1.0	0.1/0.2/0.3nH	15 / 300MHz	0.35	800	13
1.2	0.1/0.2/0.3nH	15 / 300MHz	0.35	800	13
1.5	0.1/0.2/0.3nH	15 / 300MHz	0.35	800	10
1.8	0.1/0.2/0.3nH	15 / 300MHz	0.35	300	10
2.2	0.1/0.2/0.3nH	15 / 300MHz	0.35	300	8
2.7	0.1/0.2/0.3nH	15 / 300MHz	0.45	300	6
3.3	0.1/0.2/0.3nH	15 / 300MHz	0.45	300	6
3.9	0.1/0.2/0.3nH	15 / 300MHz	0.45	300	6
4.7	0.1/0.2/0.3nH	15 / 300MHz	0.55	300	5
5.6	0.1/0.2/0.3nH	15 / 300MHz	0.65	300	5
6.8	0.1/0.2/0.3nH	15 / 300MHz	0.75	300	5
8.2	0.1/0.2/0.3nH	15 / 300MHz	0.95	300	4
10	1/2/3/5%	15 / 300MHz	0.95	300	4
12	1/2/3/5%	15 / 300MHz	1.05	300	3
15	1/2/3/5%	15 / 300MHz	1.35	300	3
18	1/2/3/5%	15 / 300MHz	1.65	300	2
22	1/2/3/5%	15 / 300MHz	1.95	250	2
27	1/2/3/5%	15 / 300MHz	2.35	250	2
33	1/2/3/5%	15 / 300MHz	2.75	250	1.5
39	1/2/3/5%	15 / 300MHz	3.00	200	1.5
47	1/2/3/5%	15 / 300MHz	3.00	200	1.5
56	1/2/3/5%	15 / 300MHz	5.00	150	1
68	1/2/3/5%	15 / 300MHz	5.00	150	1
100	1/2/3/5%	15 / 300MHz	7.50	100	1

Test Equipment: HP4286A+Agilent 16196A

Standard Electrical Specifications

0402 Chip Inductors


Inductance (nH)	Tolerance (% or nH)	Quality Factor /min.	Resistance DC/Max (Ohm)	Current DC/Max (mA)	Self Resonant Frequency/min. (GHz)
0.2	0.1/0.2/0.3nH	13 / 500MHz	0.10	800	14
0.4	0.1/0.2/0.3nH	13 / 500MHz	0.10	800	14
0.8	0.1/0.2/0.3nH	13 / 500MHz	0.15	700	14
1.0	0.1/0.2/0.3nH	13 / 500MHz	0.15	700	12
1.2	0.1/0.2/0.3nH	13 / 500MHz	0.15	700	12
1.5	0.1/0.2/0.3nH	13 / 500MHz	0.25	700	10
1.6	0.1/0.2/0.3nH	13 / 500MHz	0.25	560	10
1.8	0.1/0.2/0.3nH	13 / 500MHz	0.25	560	10
2.0	0.1/0.2/0.3nH	13 / 500MHz	0.35	560	8
2.2	0.1/0.2/0.3nH	13 / 500MHz	0.35	440	8
2.7	0.1/0.2/0.3nH	13 / 500MHz	0.35	440	8
3.1	0.1/0.2/0.3nH	13 / 500MHz	0.45	380	6
3.3	0.1/0.2/0.3nH	13 / 500MHz	0.45	380	6
3.6	0.1/0.2/0.3nH	13 / 500MHz	0.55	380	6
3.9	0.1/0.2/0.3nH	13 / 500MHz	0.55	340	6
4.7	0.1/0.2/0.3nH	13 / 500MHz	0.65	320	6
5.6	0.1/0.2/0.3nH	13 / 500MHz	0.85	280	6
5.9	0.1/0.2/0.3nH	13 / 500MHz	0.85	280	6
6.8	0.1/0.2/0.3nH	13 / 500MHz	1.05	260	6
7.2	0.1/0.2/0.3nH	13 / 500MHz	1.05	260	6
8.0	0.1/0.2/0.3nH	13 / 500MHz	1.25	220	5.5
8.2	0.1/0.2/0.3nH	13 / 500MHz	1.25	220	5.5
9.1	0.1/0.2/0.3nH	13 / 500MHz	1.25	220	5.5
10	1/2/3/5%	13 / 500MHz	1.35	200	4.5
12	1/2/3/5%	13 / 500MHz	1.55	180	3.7
13.8	1/2/3/5%	13 / 500MHz	1.75	180	3.7
15	1/2/3/5%	13 / 500MHz	1.75	130	3.3
17	1/2/3/5%	13 / 500MHz	1.95	100	3.1
18	1/2/3/5%	13 / 500MHz	2.15	100	3.1
20.8	1/2/3/5%	13 / 500MHz	2.55	90	2.8
22	1/2/3/5%	13 / 500MHz	2.65	90	2.8
27	1/2/3/5%	13 / 500MHz	3.25	75	2.5
33	1/2/3/5%	13 / 500MHz	3.75	75	2.5

Test Equipment: HP4286A+Agilent 16196B


* Viking is capable to manufacture the optional spec based on customer's requirement.

Inductor Electrical Characteristics-0603 Series


AL03BT1N0

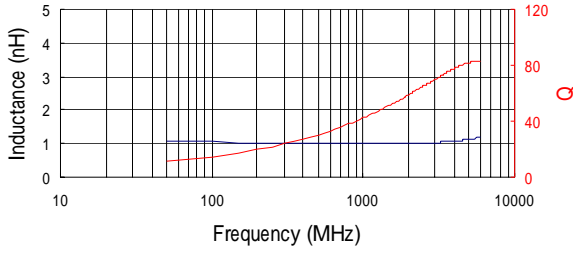


AL03BT1N2

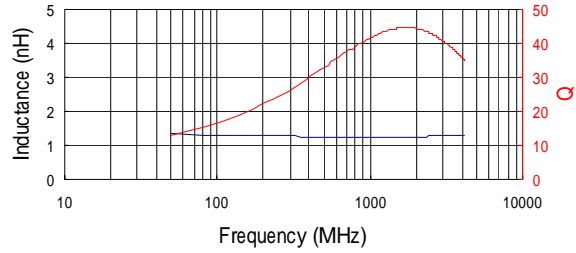


AL03BT1N5

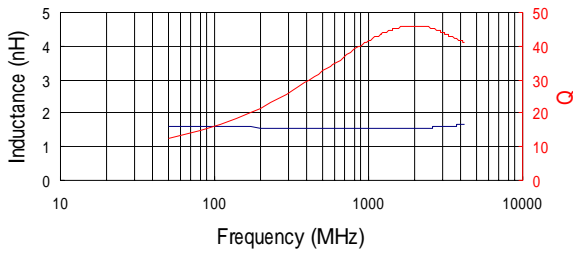


AL03BT1N8

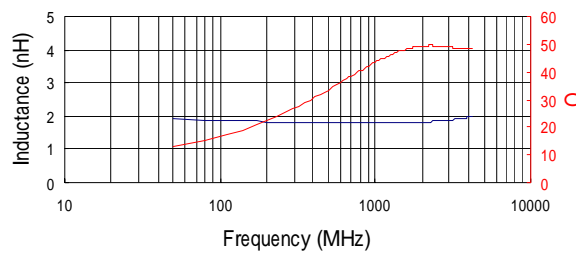


AL03BT2N2

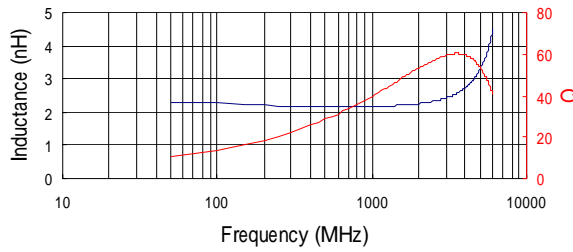


AL03BT2N7

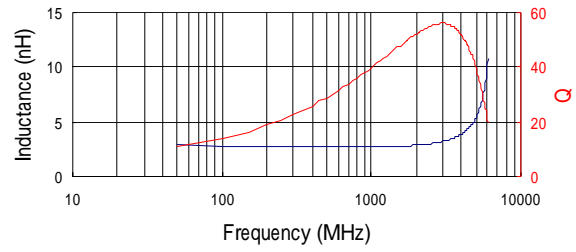

AL03BT3N3

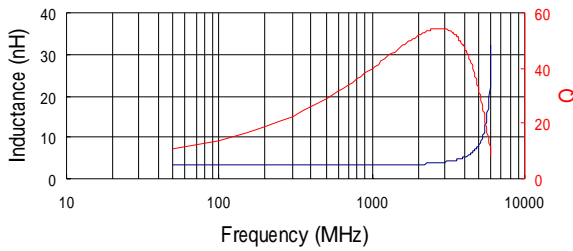


AL03BT3N9

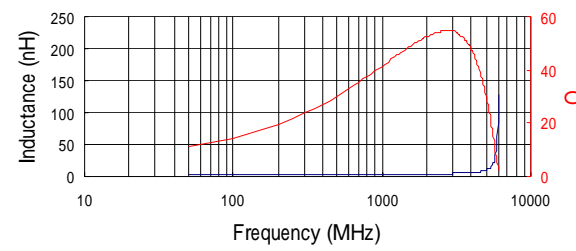


Inductor Electrical Characteristics-0603 Series


AL03BT4N7

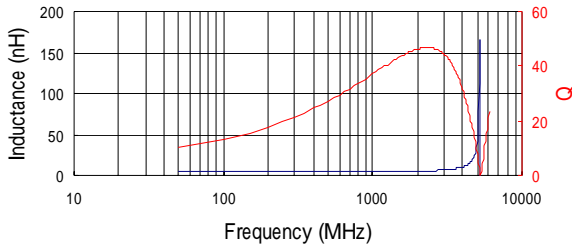


AL03BT5N6

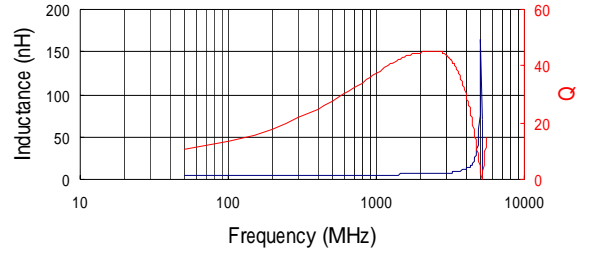


AL03BT6N8

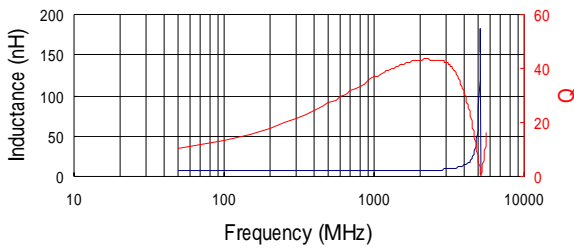


AL03BT8N2

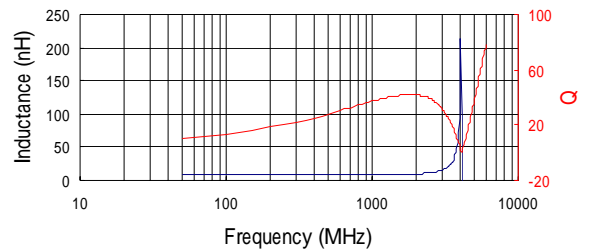


AL03GT10N

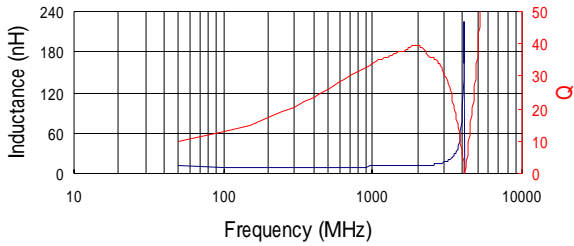

AL03GT12N

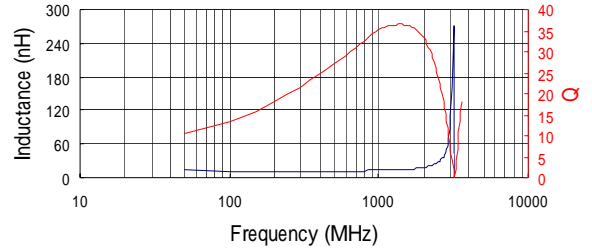

AL03GT15N

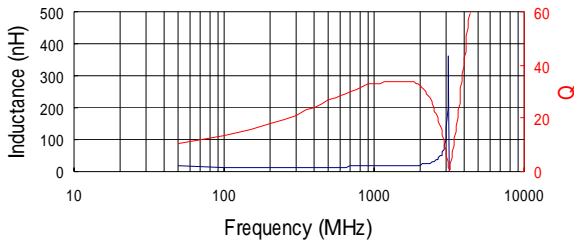

AL03GT18N

